

X-Y Force Type Load Cells

X-Y Series

Ideal for tire uniformity measurement, etc.

Simultaneous measurement in the X and Y directions with one unit

Structure designed for excellent toughness and durability

Minimal mutual interference with simultaneous loading on the X and Y axes



Models & Capacities


Model No.	Capacity
XY-500L/250L	X-500 kg (5 kN)
	Y-250 kg (2.5 kN)
XY-750L/250L	X-750 kg (7.5 kN)
	Y-250 kg (2.5 kN)
XY-1000L/500L	X-1000 kg (10 kN)
	Y-500 kg (5 kN)

Note: XY-500L/500L to be specially designed and re-quoted


Specifications

Rated capacity (R.C.)	X-500 kg Y-250 kg (X:5 kN, Y:2.5 kN) X-750 kg Y-250 kg (X:7.5 kN, Y:2.5 kN) X-1000 kg Y-500 kg (X:10 kN, Y:5 kN)
Rated output (R.O.)	2 mV/V ±1% (for X, Y)
Non linearity	0.1% R.O.
Hysteresis	0.05% R.O.
Repeatability	0.05% R.O.
Recommended excitation voltage	5 V to 10 V AC/DC
Max. excitation voltage	20 V AC/DC
Zero balance	±1% R.O.
Input terminals bridge resistance	350 Ω ± 3.5 Ω
Output terminals bridge resistance	350 Ω ± 3.5 Ω
Insulation resistance	2000 MΩ (B/E DC 50 V)
Cable diameter/length	∅7, 4-core shielded cable, 10 m, connector end
Zero point temperature effect	0.05% R.O./10 °C
Temperature effect on output	0.05% Load./10 °C
Temperature compensated range	-10 °C to +70 °C
Temperature usable range	-10 °C to +70 °C
Safe overload	150% R.L.
Limited overload	200% R.L.
Dustproof/Waterproof	IP54
Natural frequency	More than 1 kHz
Crosstalk	2.5 N or less (5 kN / 2.5 kN) 5.0 N or less (7.5 kN / 5 kN, 10 kN, / 2.5 kN, 5 kN / 5 kN)

X-Y Load Cells Dimensions

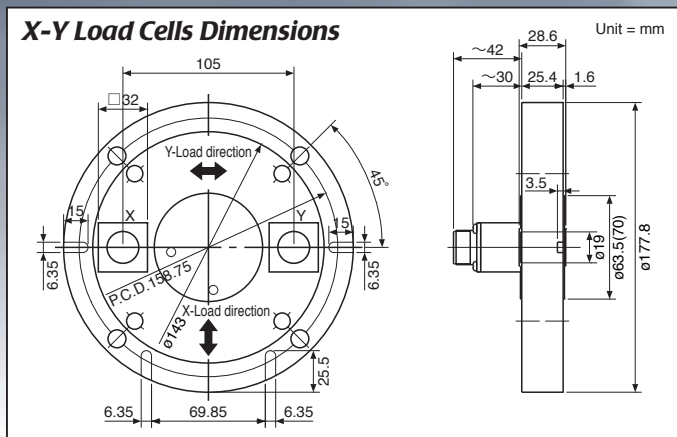

Wiring Information



Appearance and/or specifications subject to change for improvement without notice.

A&D ...Clearly a Better Value

A&D Company, Limited
3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN
Telephone: [81] (3) 5391-6132 Fax: [81] (3) 5391-6148
http://www.aandd.jp

A&D Engineering, Inc.
1756 Automation Parkway, San Jose, CA 95131 U.S.A.
Telephone: [1] (408) 263-5333 Fax: [1] (408) 263-0119

A&D Australasia Pty Ltd.
32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA
Telephone: [61] (8) 8301-8100 Fax: [61] (8) 8352-7409

A&D Instruments Ltd.
Unit 24/26 Blacklands Way Abingdon Business Park,
Abingdon, Oxon OX14 1DY UNITED KINGDOM
Telephone: [44] (1235) 550420 Fax: [44] (1235) 550485

A&D Korea Limited
Manhattan Bldg. 8F, 36-2 Yoido-dong, Youngdeungpo-gu,
Seoul, KOREA
Telephone: [82] (2) 780-4101 Fax: [82] (2) 782-4280

A&D RUS Co., Ltd.
Verenskaya str.17, Moscow, 121357 RUSSIA,
Telephone: [7] (495) 937-33-44 Fax: [7] (495) 937-55-66

A&D Instruments India Private Limited
509 Udyog Vihar Phase V Gurgaon-122 016,
Haryana, INDIA
Telephone: [91] (124) 471-5555 Fax: [91] (124) 471-5599

A&D Technology, Inc.
4622 Runway Blvd. Ann Arbor, MI 48108 U.S.A.
Telephone: [1] (734) 973-1111 Fax: [1] (734) 973-1103

A&D Technology Trading (Shanghai) Co., Ltd.
Room 101, No.1 Fu Hai Business Building, No. 289,
Zhang Jiang Bi Sheng Road, Shanghai 201204, CHINA
Telephone: [86] (21) 3393-2340 Fax: [86] (21) 3393-2347

A&D Europe GmbH
Im Leuschnerpark 4, D-64347 Griesheim, GERMANY
Telephone: [49] (6155) 605-227 Fax: [49] (6155) 605-100